


## TYPICAL APPLICATION

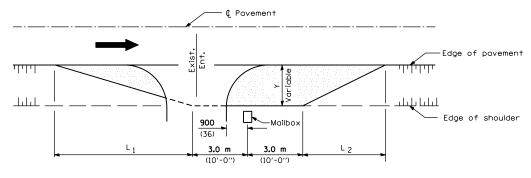

| DIMENSIONS - m          |                  |                       |
|-------------------------|------------------|-----------------------|
| Width of<br>Shoulder    | 1.2-2.4<br>(4-8) | <b>3.0</b> (10)       |
| Width of<br>Turnout (Y) | <b>2.4</b> (8)   | <b>2.4-3.0</b> (8-10) |
| L <sub>1</sub>          | <b>9.5</b> (32)  | <b>9.5</b> (32)       |
| L <sub>2</sub>          | <b>6.0</b> (20)  | <b>6.0</b> (20)       |


## MAILBOX ON FARSIDE OF ENTRANCE

MAILBOX ON NEARSIDE OF ENTRANCE

Illinois Department of Transportation

ENGINEER OF POLICY AND PROTEDURES

PASSED

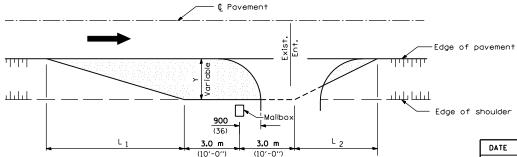

## GENERAL NOTES

Mailboxes shall be mounted such that the face of the mailbox is 150 mm (6") to 300 mm (12") and the post a minimum of 600 mm (24") from the edge of the turnout surfacing.

All dimensions are in millimeters (inches) unless otherwise shown.

| DATE    | REVISIONS               |  |
|---------|-------------------------|--|
| 1-1-97  | Renum. Standard 2171-1. |  |
|         | Deleted note regarding  |  |
|         | Township & Dist. roads  |  |
| 6-15-94 | Totally revised.        |  |
|         | Added metric.           |  |
|         |                         |  |

MAILBOX TURNOUT

**STANDARD 406201**